



bioniq


NATURALLY TECHNICAL



PROLIGHT
designed to create

POINT




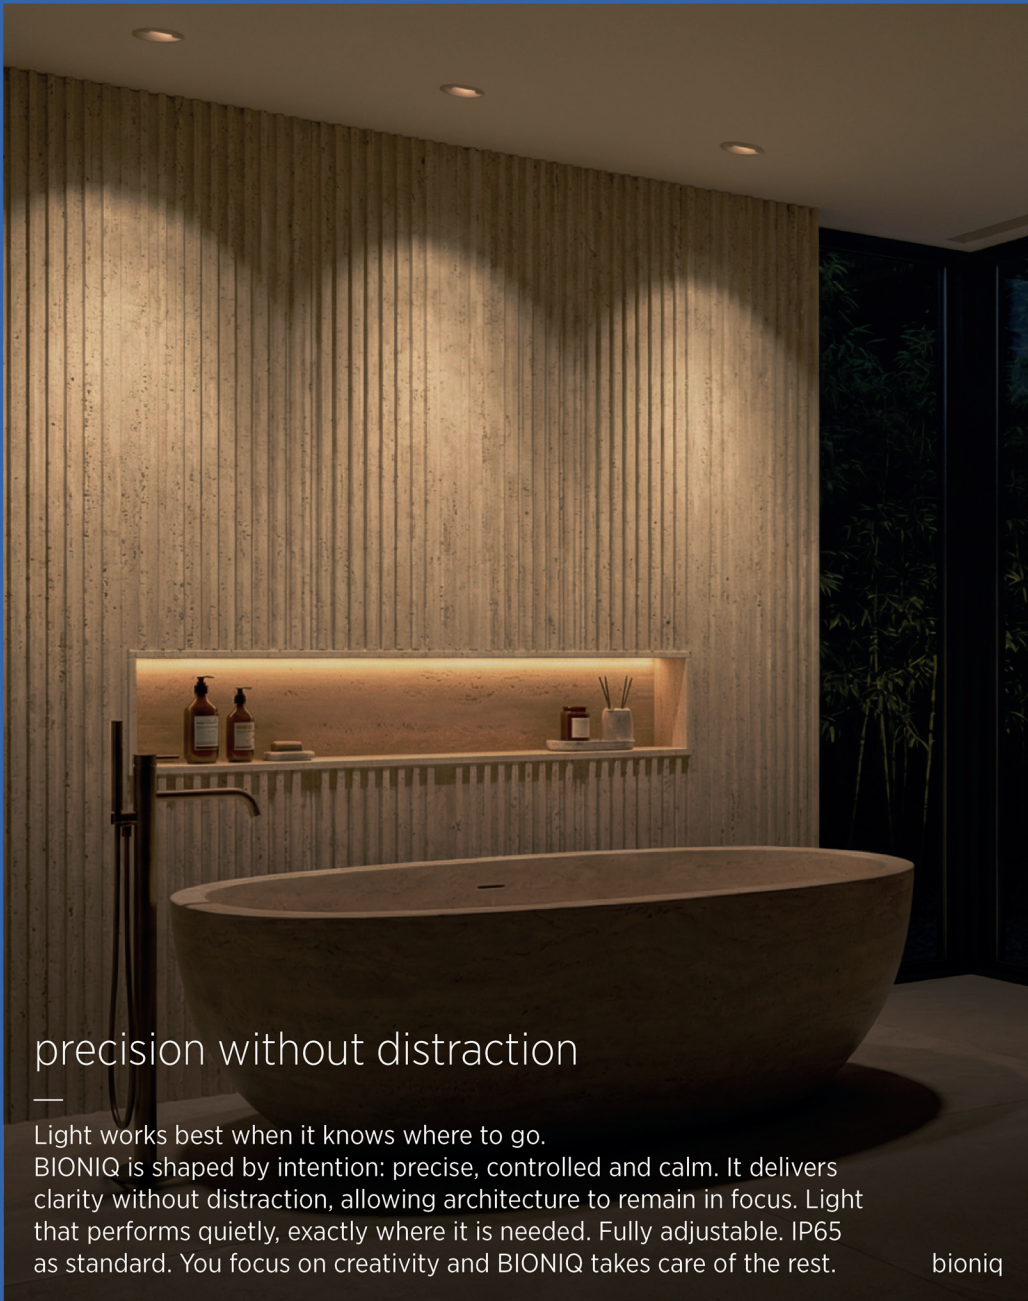

precision without distraction

Light works best when it knows where to go. BIONIQ is shaped by intention: precise, controlled and calm. It delivers clarity without distraction, allowing architecture to remain in focus. Light that performs quietly, exactly where it is needed. Fully adjustable. IP65 as standard. You focus on creativity and BIONIQ takes care of the rest.

bioniq

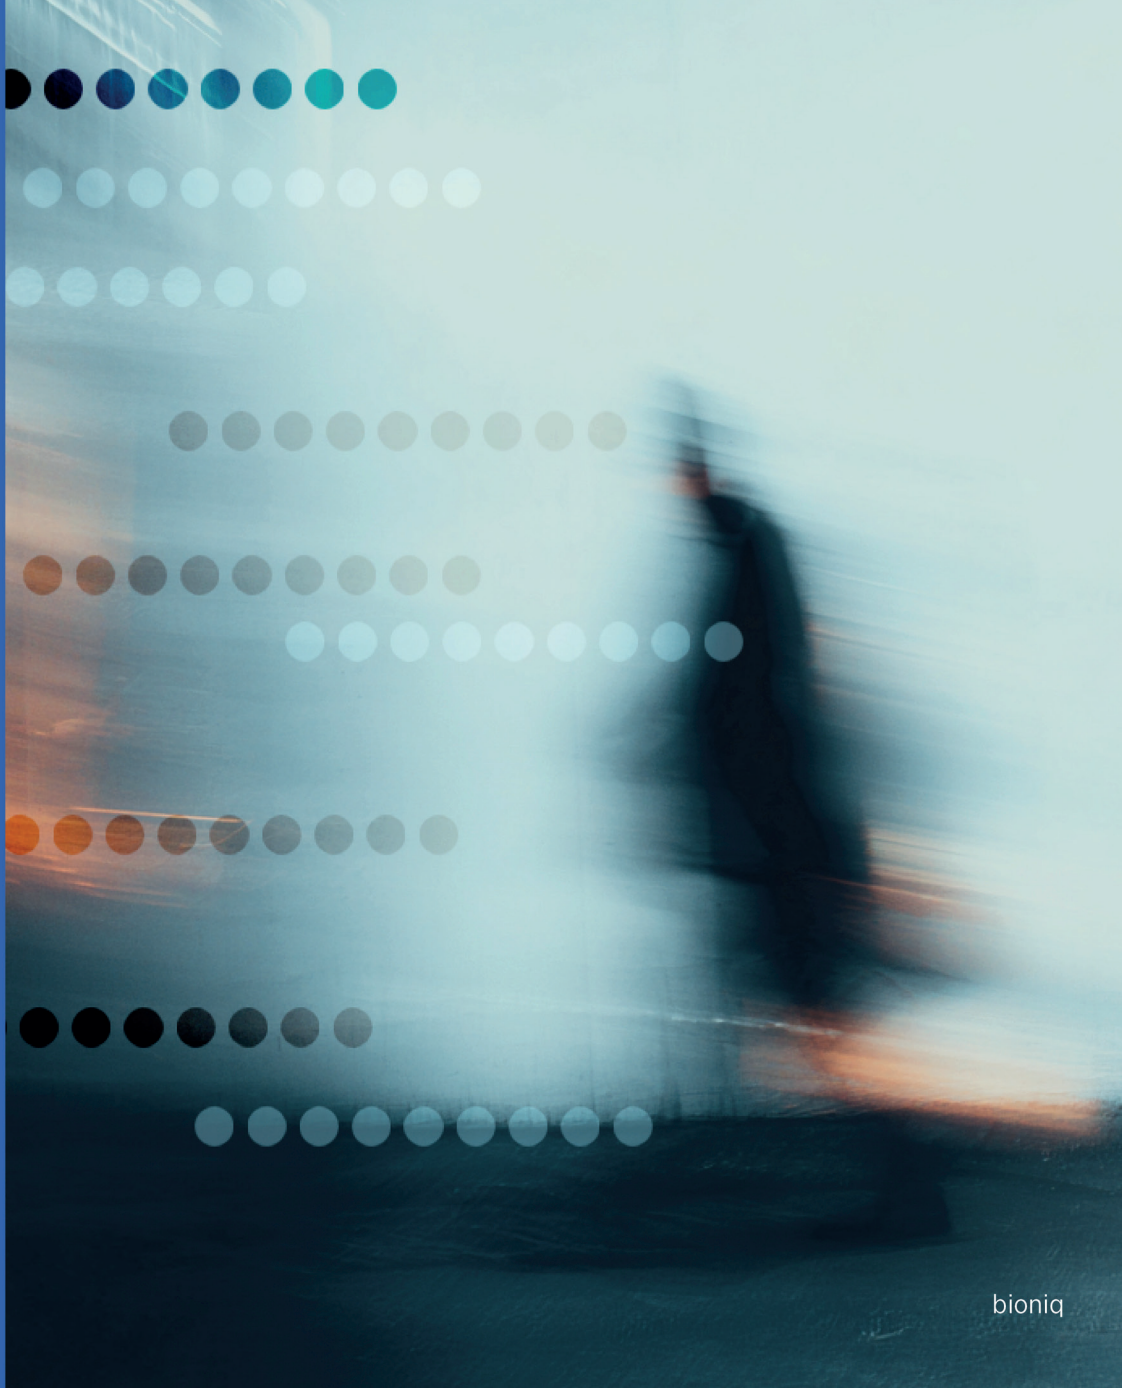

bioniq



bioniq



bioniq



bioniq



BIONIQ is a professional lighting solution designed for projects where light must be precise, controlled and calm. It delivers clarity without visual noise, allowing architecture to remain in focus. A tool shaped by intention, placing light exactly where it is needed: quietly, reliably and with purpose.

bioniq



designed to be perfect. engineered to be simple.

The trimless version of BIONIQ is designed to integrate seamlessly into the ceiling, becoming part of the architecture. A specially developed PROLICHT double-level hole saw ensures precise ceiling preparation and a perfectly flush result. Simple to install, clean in appearance.



bioniq

beam control

SPOT to WIDE FLOOD beam distributions with high-performance optics ensure precise and efficient lighting.



optics

Optional accessories such as honeycombs, linear and spread lenses allow accurate beam shaping to suit project requirements.

light colours


From super warm to functional white light, BIONIQ offers a broad range of colour temperatures.

With the introduction of 2400 K, the system is ideal for creating warm, cosy atmospheres - especially in residential and hospitality applications.



ingress protection

Sealed construction with IP65 protection as standard ensures durability in demanding environments. The Bioniq Wallwash version is available with IP20, optimised for vertical illumination applications.

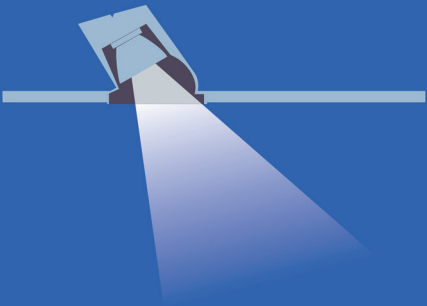

zero light leakage


A light-tight rear design prevents unwanted light emission. Light is directed exclusively forward, ensuring clean integration in perforated or acoustic ceilings.

secondary reflector options

Different reflector finishes allow precise visual fine-tuning of the light appearance.

In addition to the optional glossy black ARC (Anti-Reflection Coated) cone for reduced glare without compromising efficiency, chrome, matt white and matt black finishes are available.

All PROLICHT colours can also be specified for further visual integration.

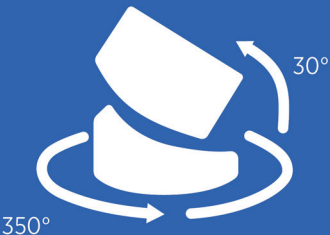

precise adjustment

Smooth rotation up to 350° and tilting up to 30° allow accurate on-site alignment. Visible degree markings ensure consistent results across multiple luminaires.



trimless



BIONIQ

DIMENSION

H 86 - 122: $\varnothing$ 48 - 87 mm

LIGHT OUTPUT


152 - 2790 lm

POWER

8.03 - 21.91 W

LED / CCT

2400 K, 2700 K, 3000 K,
3500 K, 4000 K
TUNABLE WHITE:
2700 k - 6500 K

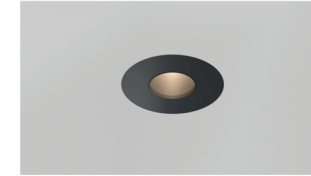

BIONIQ PINHOLE

DIMENSION

H 94: $\varnothing$ 67 mm

LIGHT OUTPUT


270 - 951 lm

POWER

12.32 - 12.98 W

LED / CCT

2400 K, 2700 K, 3000 K,
3500 K, 4000 K
TUNABLE WHITE:
2700 k - 6500 K

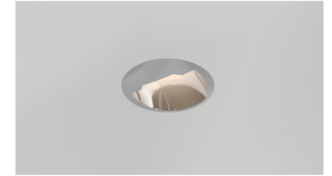

BIONIQ WALLWASH

DIMENSION

H 84 - 94: $\varnothing$ 48 - 67 mm

LIGHT OUTPUT

293 - 1138 lm


POWER

5.5 - 12.31 W

LED / CCT

2400 K, 2700 K, 3000 K,
3500 K, 4000 K
TUNABLE WHITE:
2700 k - 6500 K

recessed

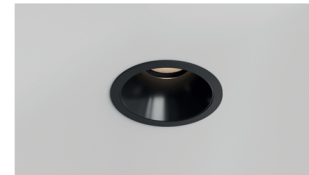

BIONIQ

DIMENSION

H 86 - 122: $\varnothing$ 62 - 108 mm

LIGHT OUTPUT


152 - 2790 lm

POWER

8.03 - 21.91 W

LED / CCT

2400 K, 2700 K, 3000 K,
3500 K, 4000 K

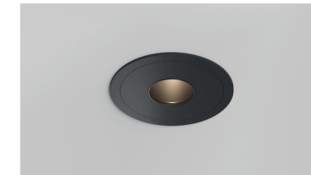

BIONIQ PINHOLE

DIMENSION

H 94: $\varnothing$ 82 mm

LIGHT OUTPUT

270 - 951 lm

POWER

12.32 - 12.98 W

LED / CCT

2400 K, 2700 K, 3000 K,
3500 K, 4000 K
TUNABLE WHITE:
2700 k - 6500 K



BIONIQ WALLWASH

DIMENSION

H 84 - 94: $\varnothing$ 62 - 82 mm

LIGHT OUTPUT


324 - 1029 lm

POWER

5.5 - 12.31 W


LED / CCT

2400 K, 2700 K, 3000 K,
3500 K, 4000 K
TUNABLE WHITE:
2700 k - 6500 K

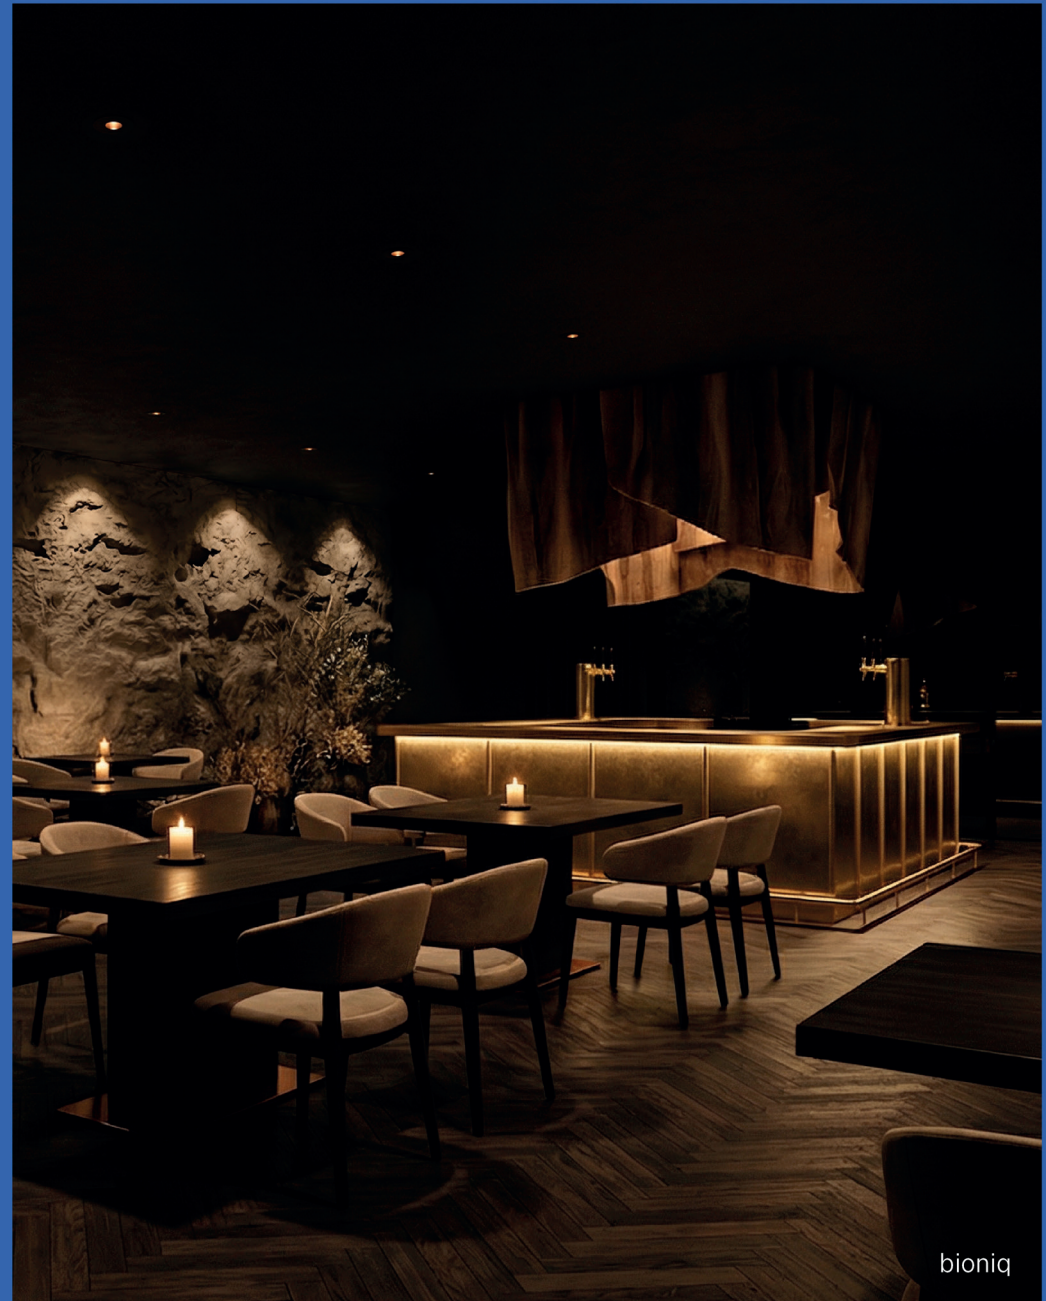




bioniq

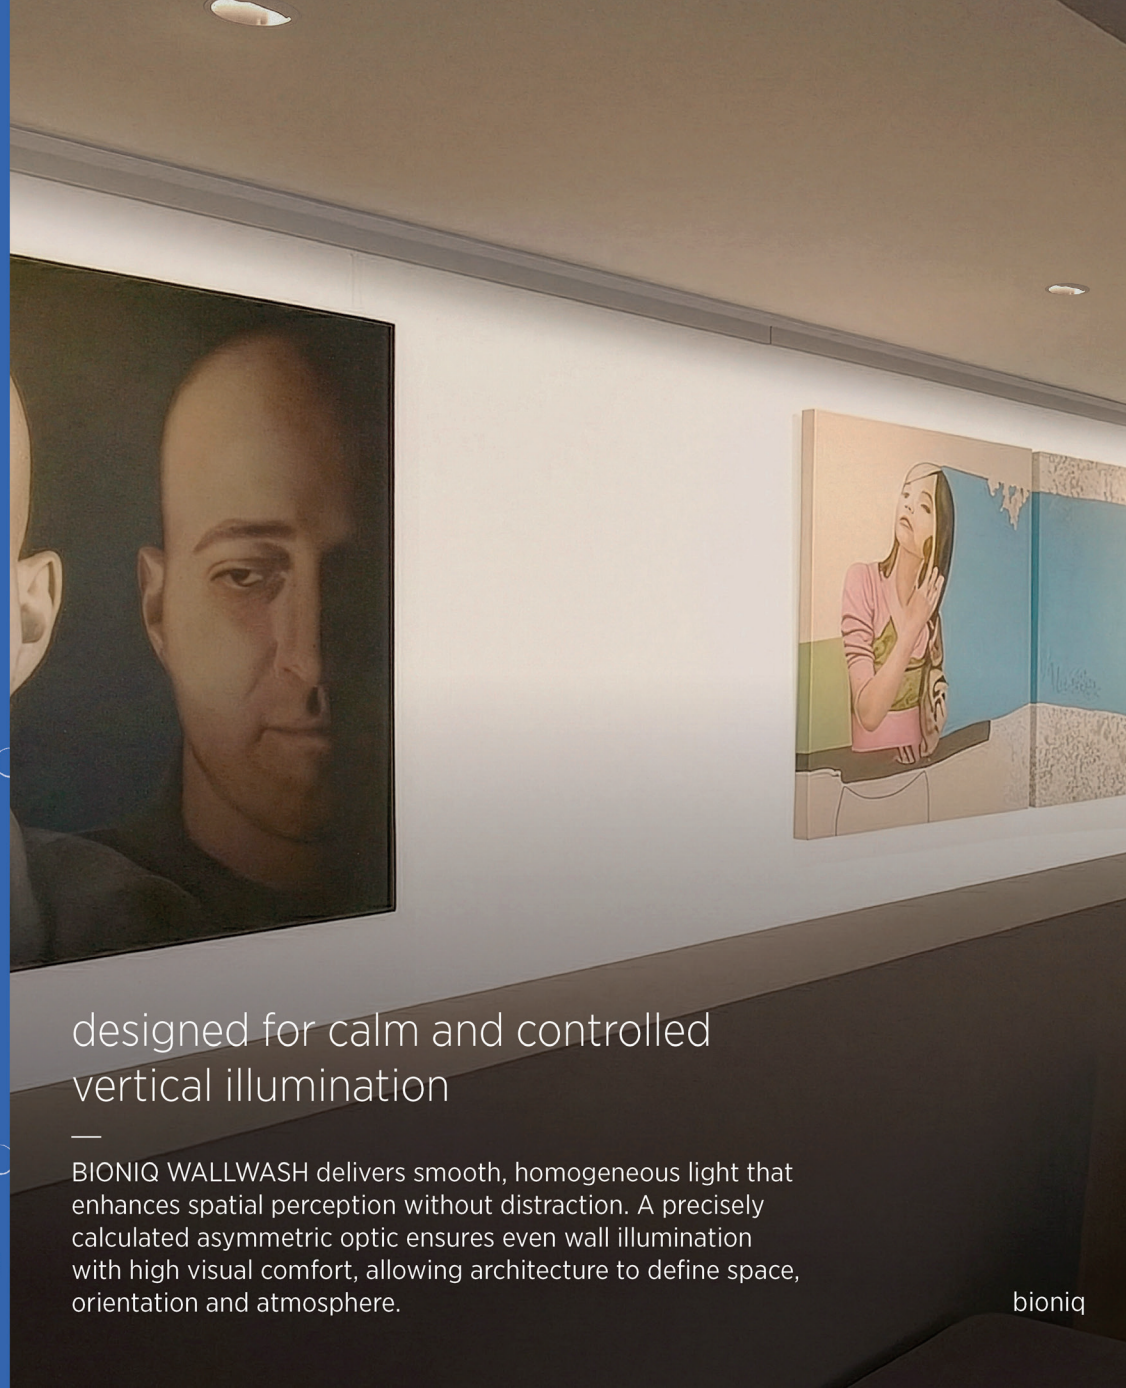

designed for calm and controlled
vertical illumination

—
BIONIQ WALLWASH delivers smooth, homogeneous light that enhances spatial perception without distraction. A precisely calculated asymmetric optic ensures even wall illumination with high visual comfort, allowing architecture to define space, orientation and atmosphere.

bioniq

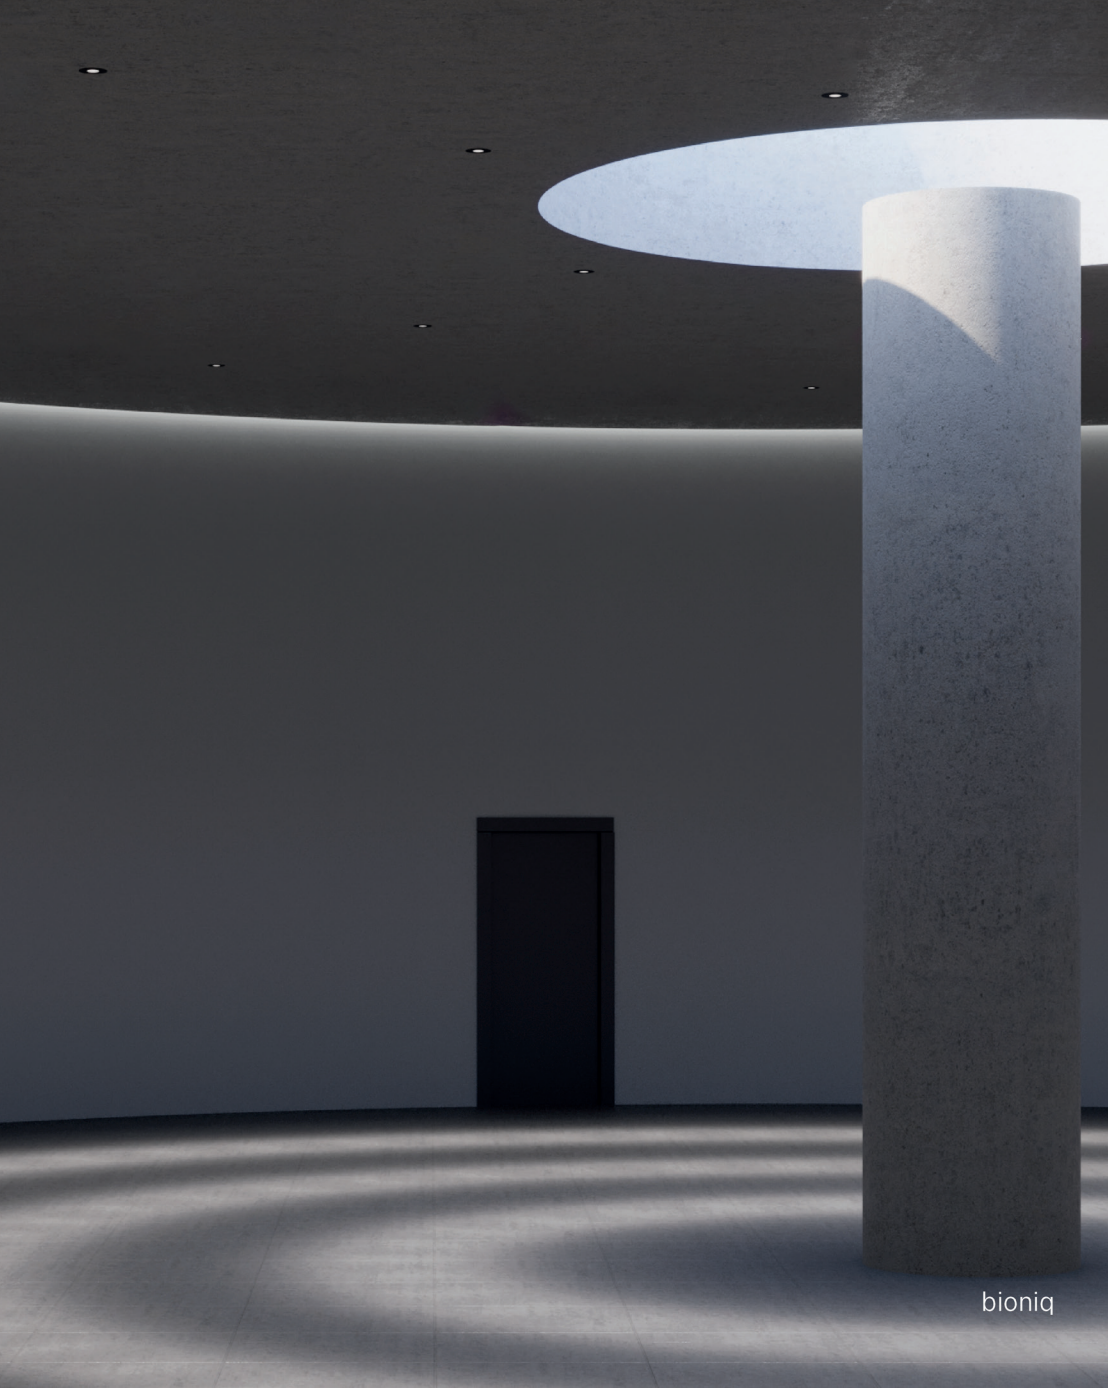

bioniq



bioniq



PROLICHT
designed to create



Where precision
masters every
detail. Configure
your own BIONIQ.