



hypro

HYBRID FLEXIBILITY




PROLICHT
designed to create

LINE





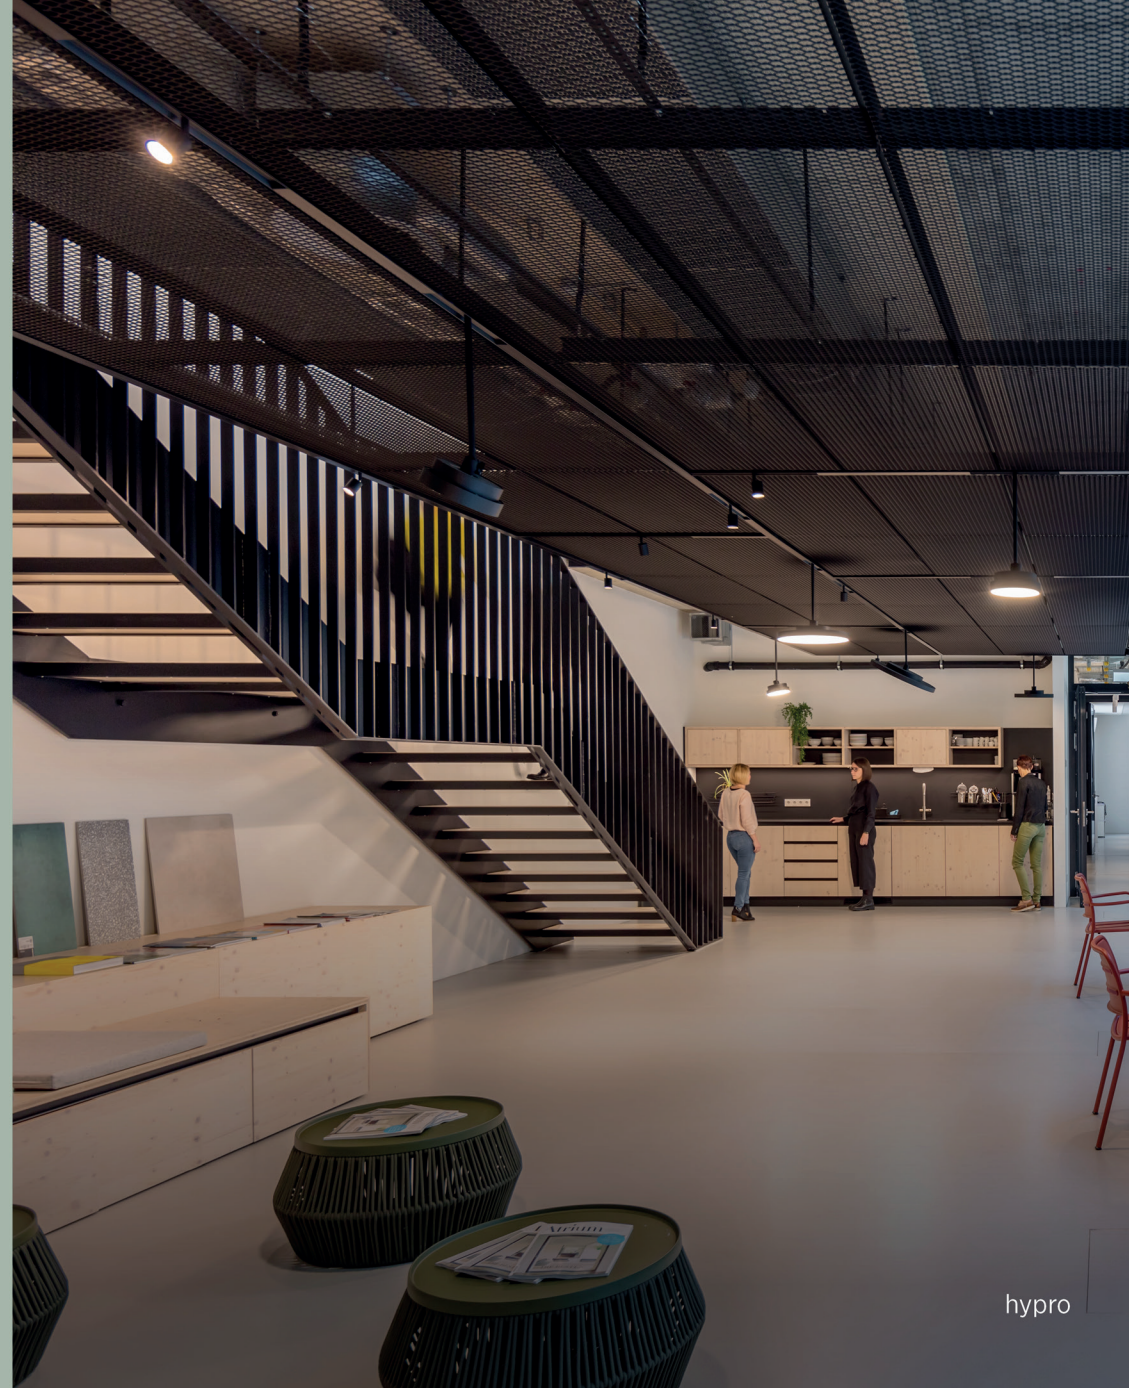



HYPRO is a modular three-dimensional lighting system for professional applications, combining linear profiles, connectors and inserts to deliver continuous, glare-controlled lighting across ceilings, walls and floors.

hypro

the next step in human-centric lighting

Hypro-X and Hypro-F support extended indirect lighting with wide-beam, homogeneous ceiling illumination. Hypro-F is fully configurable in Tunable White for both direct and indirect lighting via revised Rico optics with microprismatic control.




batwing lens

The Batwing lens provides uniform indirect lighting with wide-beam distribution, ensuring consistent light quality and homogeneous colour mixing, including Tunable White applications. Available for Hypro-X and Hypro-F.



mounting options




HYPRO supports ceiling-mounted, wall-mounted and free-standing installations, enabling consistent lighting solutions across different spatial configurations.

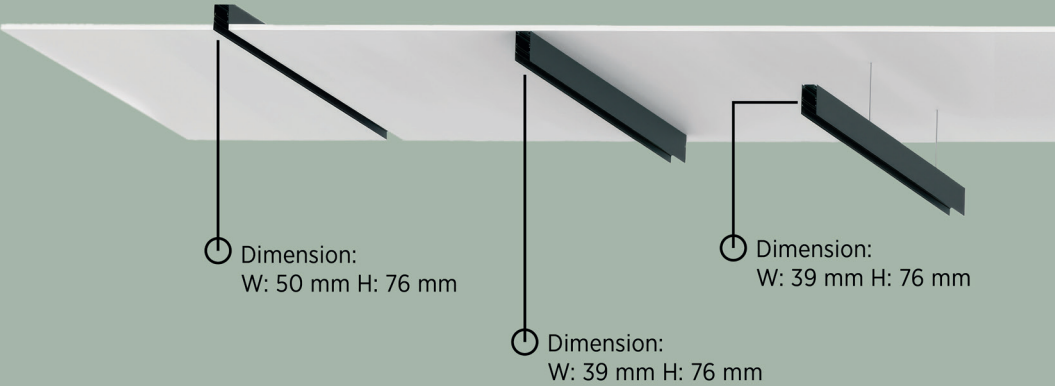

RECESSED

SURFACE

SUSPENDED



hypro

hypro inserts



CENTRIQ & CENTRIQ IN

DIMENSION
H 74 - 190: ø 29 - 83 mm

LIGHT OUTPUT
236 - 3450 lm

POWER
4.39 - 36.22 W

LED / CCT
2700 K, 3000 K,
3500 K, 4000 K
TUNABLE WHITE:
2700 K - 6500 K



OIKO PRO IN

DIMENSION
H 165 - 177: 482 - 780 x 65 mm

LIGHT OUTPUT
919 - 1932 lm

POWER
13.96 - 21.13 W

LED / CCT
2700 K, 3000 K,
3500 K, 4000 K
TUNABLE WHITE:
2700 K - 6500 K



HADI-Q & HADI-M

DIMENSION
H 48: 1242 - 1403 x 240 mm

LIGHT OUTPUT
3911 - 6119 lm

POWER
37.31 - 77.79 W

LED / CCT
3000 K, 4000 K



SIGN DIVA TUBE

DIMENSION
H 72 - 86: ø 400 - 570 mm

LIGHT OUTPUT
1733 - 5722 lm

POWER
17.22 - 48.62 W

LED / CCT
2700 K, 3000 K,
3500 K, 4000 K




RICO

DIMENSION
H 50: 705 - 1408 x 36 mm

LIGHT OUTPUT
1504 - 4107 lm

POWER
15.95 - 36.41 W

LED / CCT
2700 K, 3000 K,
3500 K, 4000 K,
TUNABLE WHITE:
2700 K - 6500 K



HYPLINE

DIMENSION
H 50: 705 - 1408 x 29 mm

LIGHT OUTPUT
1290 - 3901 lm

POWER
16.28 - 36.41 W

LED / CCT
2700 K, 3000 K,
3500 K, 4000 K,
TUNABLE WHITE:
2700 K - 6500 K



SNOOKER

DIMENSION
H 72: ø 72 mm

LIGHT OUTPUT
330 - 379 lm

POWER
6.4 W

LED / CCT
2700 K, 3000 K,
3500 K, 4000 K



BILO

DIMENSION
H 120: ø 120 mm

LIGHT OUTPUT
377 lm

POWER
6.4 W

LED / CCT
2700 K, 3000 K




MELT MINI

DIMENSION
H 270: ø 280 mm

LIGHT OUTPUT
44 - 235 lm

POWER
6.2 W

LED / CCT
3000 K



MAGIQ WALLWASH

DIMENSION
H 85: 760 x 35, 840 x 35 mm

LIGHT OUTPUT
2125 - 2564 lm

POWER
31.3 W

LED / CCT
2700 K, 3000 K, 4000 K



HANGOVER PLUG

DIMENSION
H 150 - 450: ø 28 - 75 mm

LIGHT OUTPUT
283 - 1919 lm

POWER
6.4 - 19.48 W

LED / CCT
2700 K, 3000 K,
3500 K, 4000 K

free-standing

The HYPRO free-standing luminaires provide efficient, glare-controlled lighting for individual workstations and flexible office layouts. Designed for direct and indirect illumination, they ensure uniform light distribution and high visual comfort while remaining fully adaptable to changing workspace requirements.



HYPRO-F 90
DIMENSION
H 2220: 1170 - 1310 x 380 mm
LIGHT OUTPUT
1749 - 7055 lm
POWER
28.38 - 95.9 W
LED / CCT
3000 K, 4000 K
TUNABLE WHITE:
2700 K - 6500 K



HYPRO-F 160
DIMENSION
H 2220: 1510 - 1655 x 380 mm
LIGHT OUTPUT
1749 - 7055 lm
POWER
28.38 - 95.9 W
LED / CCT
3000 K, 4000 K
TUNABLE WHITE:
2700 K - 6500 K




HYPRO-F DOUBLE
DIMENSION
H 2220: 2284 x 441 mm
LIGHT OUTPUT
9093 - 10956 lm
POWER
114.44 - 117.08 W
LED / CCT
3000 K, 4000 K



HYPRO-F DESK
DIMENSION
H 1511: 1167 x 150 mm
LIGHT OUTPUT
4546 - 5478 lm
POWER
57.22 - 58.54 W
LED / CCT
3000 K, 4000 K



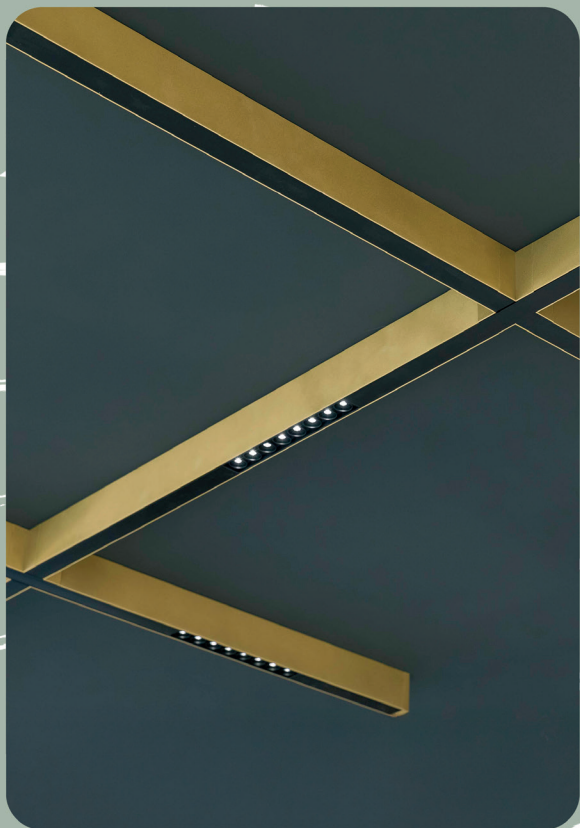

hypro



hypro



hypro



hypro



PROLICHT
designed to create



Where light draws
architecture.
Configure your own
HYPRO system.