



oiko_

FOCUS OF ATTENTION



PROLICHT
designed to create

POINT





light and quietly refined

Designed to deliver exceptional visual comfort through minimal presence, OIKO integrates seamlessly into architecture. It provides calm, uniform illumination, creating spaces that feel clear, balanced and effortless.


oiko




oiko



gold beam



silent beam



black & gold

Two reflector finishes, two expressions of light. Black integrates quietly into the ceiling, while gold remains visible, adding warmth, depth and a refined architectural accent.


oiko



oiko



oiko

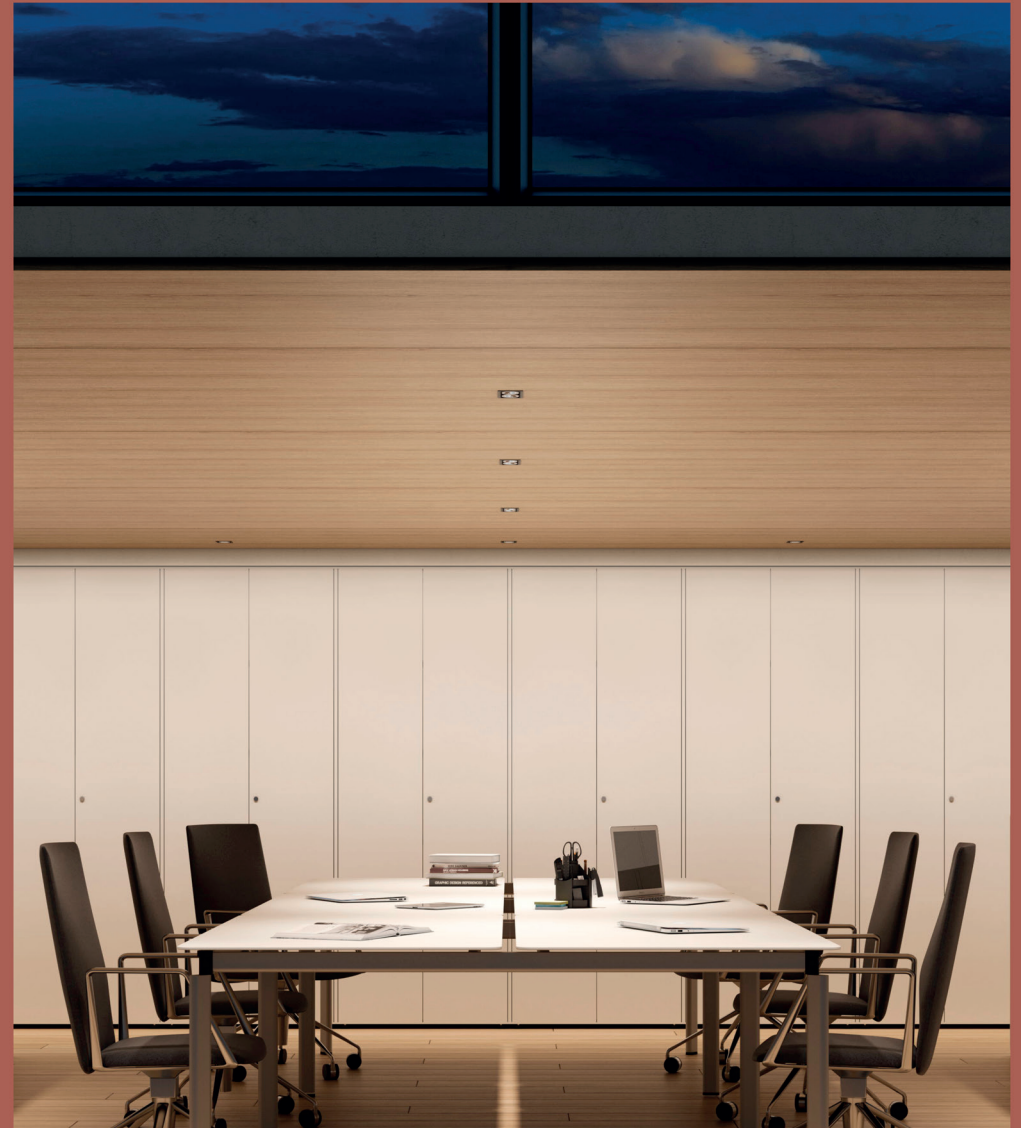

OIKO specialises in providing excellent lighting with minimal recess depth. Its range of LED downlights and spotlights provides uniform, glare-controlled illumination, even in spaces with severely limited ceiling height.

oiko

high-performance reflector technology


High-performance reflector optics ensure precise, consistent beam control without secondary light spill, including Tunable White. Beam angles from 14° to 60° and a dedicated wallwash version maintain uniform light quality across the range.



infinite applications

OIKO offers recessed, surface-mounted and suspended solutions for track and standalone installations. A wide range of reflector options, from superspot to wide beam angles, ensures precise application flexibility.


The Oiko Pro double-function optic combines wallwashing and downlight in one luminaire, making the system a versatile tool for architectural lighting design.

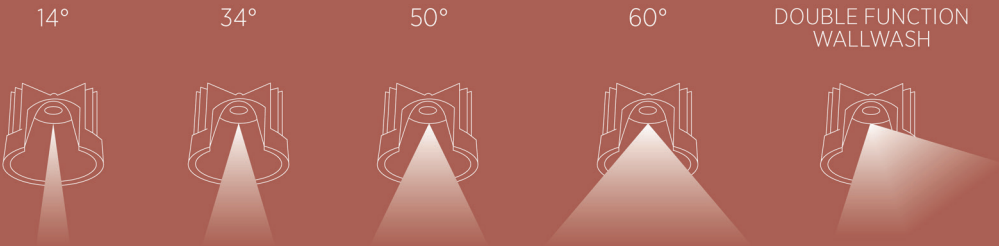

recessed




ADJUSTABLE
DIMENSION
H 93 - 116: ø 75
LIGHT OUTPUT
709 - 1645 lm
POWER
13.96 - 16.37 W
LED / CCT
2700 K, 3000 K, 3500 K, 4000 K
TUNABLE WHITE:
2700 K - 6500 K

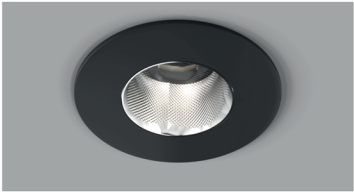

ROUND
DIMENSION
H 43 - 118: ø 75 mm
LIGHT OUTPUT
709 - 1645 lm
POWER
13.96 - 16.37 W
LED / CCT
2700 K, 3000 K, 3500 K, 4000 K
TUNABLE WHITE:
2700 K - 6500 K

trimless

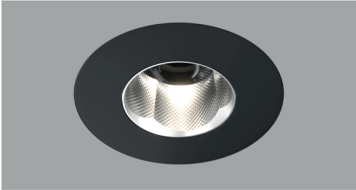

ROUND
DIMENSION
H 43 - 64: ø 75 mm
LIGHT OUTPUT
709 - 1645 lm
POWER
13.96 - 16.37 W
LED / CCT
2700 K, 3000 K, 3500 K, 4000 K
TUNABLE WHITE:
2700 K - 6500 K




ADJUSTABLE
DIMENSION
H 103 - 116: ø 75 mm
LIGHT OUTPUT
709 - 1645 lm
POWER
13.96 - 16.37 W
LED / CCT
2700 K, 3000 K, 3500 K, 4000 K
TUNABLE WHITE:
2700 K - 6500 K

surface



PRO ROUND
DIMENSION
H 125: ø 75 mm
LIGHT OUTPUT
1039 - 1451 lm
POWER
12.94 - 14.06 W
LED / CCT
2700 K, 3000 K, 3500 K, 4000 K

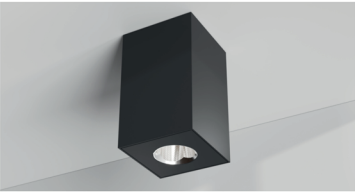

PRO SQUARE
DIMENSION
H 125: 75 x 75 mm
LIGHT OUTPUT
1039 - 1451 lm
POWER
12.94 - 14.06 W
LED / CCT
2700 K, 3000 K, 3500 K, 4000 K

suspended



ROUND
DIMENSION
H 125: ø 75 mm
LIGHT OUTPUT
1039 - 1451 lm
POWER
12.94 - 14.06 W
LED / CCT
2700 K, 3000 K, 3500 K, 4000 K



SQUARE
DIMENSION
H 125: 75 x 75 mm
LIGHT OUTPUT
1039 - 1451 lm
POWER
12.94 - 14.06 W
LED / CCT
2700 K, 3000 K, 3500 K, 4000 K

oiko pro slim

Oiko Pro Slim reduces the diameter for a more discreet presence, ideal for corridors, boutiques and showrooms that require high performance in a compact form.

recessed



DIMENSION
H 56 - 72: ø 58 mm

LIGHT OUTPUT
345 - 1254 lm

POWER
8.14 - 11.04 W

LED / CCT
2700 K, 3000 K, 3500 K, 4000 K
TUNABLE WHITE:
2700 k - 6500 K

surface



DIMENSION
H 90: ø 59 mm

LIGHT OUTPUT
345 - 1254 lm

POWER
8.14 - 11.04 W

LED / CCT
2700 K, 3000 K, 3500 K, 4000 K
TUNABLE WHITE:
2700 k - 6500 K



oiko pro in
surface



DIMENSION
H 120 - 160: ø 65 mm

LIGHT OUTPUT
919 - 1932 lm

POWER
13.96 - 21.13 W

LED / CCT
2700 K, 3000 K, 3500 K, 4000 K
TUNABLE WHITE:
2700 k - 6500 K

track



DIMENSION
H 136 - 144: 158 - 265, ø 65 mm

LIGHT OUTPUT
919 - 1932 lm


POWER
13.96 - 21.13 W

LED / CCT
2700 K, 3000 K, 3500 K, 4000 K
TUNABLE WHITE:
2700 k - 6500 K

one spotlight. four canopy options


With four canopy options, Oiko Pro In adapts seamlessly to different ceiling types and architectural contexts.

Compatible with multiple 3-phase track systems, the spot can be used across a wide range of scenarios, making it particularly suited to flexible retail environments. The driver is integrated into the adapter, reducing unnecessary components and ensuring a clean, unobtrusive track appearance.

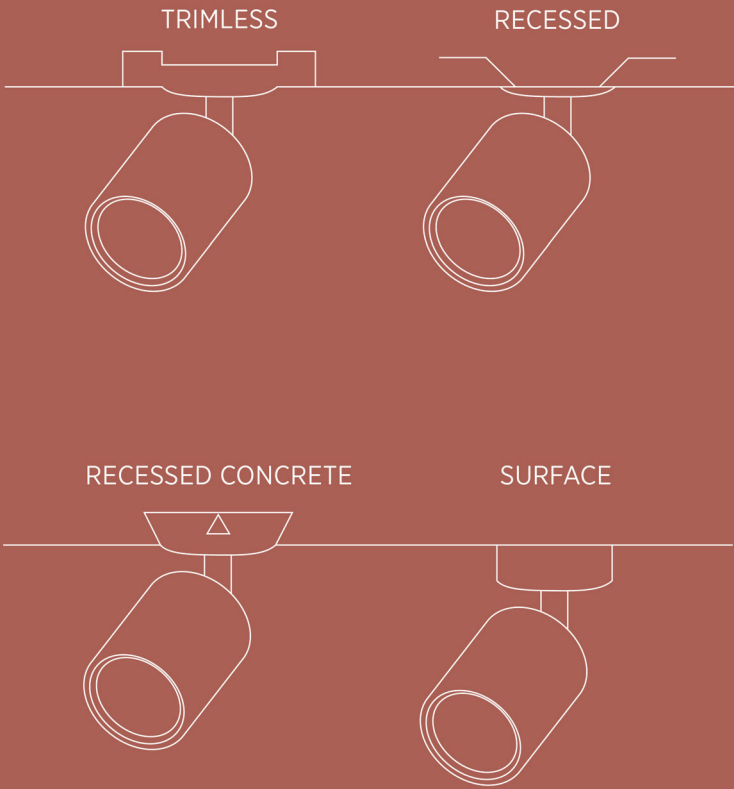

oiko pro system

trimless

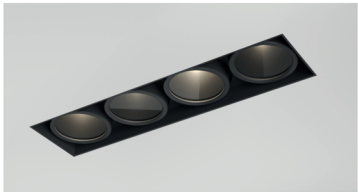


DIMENSION
H 87: 57 x 57 - 220 mm


LIGHT OUTPUT
4 x 1020 lm

POWER
39.2 W

LED / CCT
2700 K, 3000 K, 3500 K, 4000 K
TUNABLE WHITE:
2700 k - 6500 K

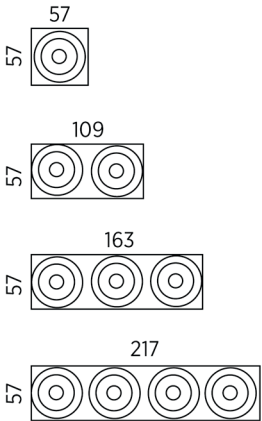

recessed

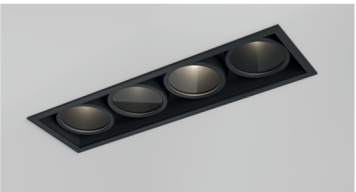


DIMENSION
H 87: 69 x 69 - 231 mm

LIGHT OUTPUT
4 x 1020 lm


POWER
39.2 W

LED / CCT
2700 K, 3000 K, 3500 K, 4000 K
TUNABLE WHITE:
2700 k - 6500 K

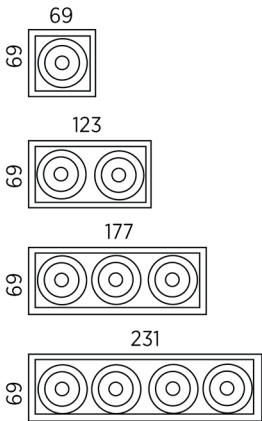

individually adjustable

No matter whether one, two, three or four downlights, Oiko Pro allows the perfect fine tuning of the lighting atmosphere. This recessed spot allows complete control to tilt or rotate each light source independently.

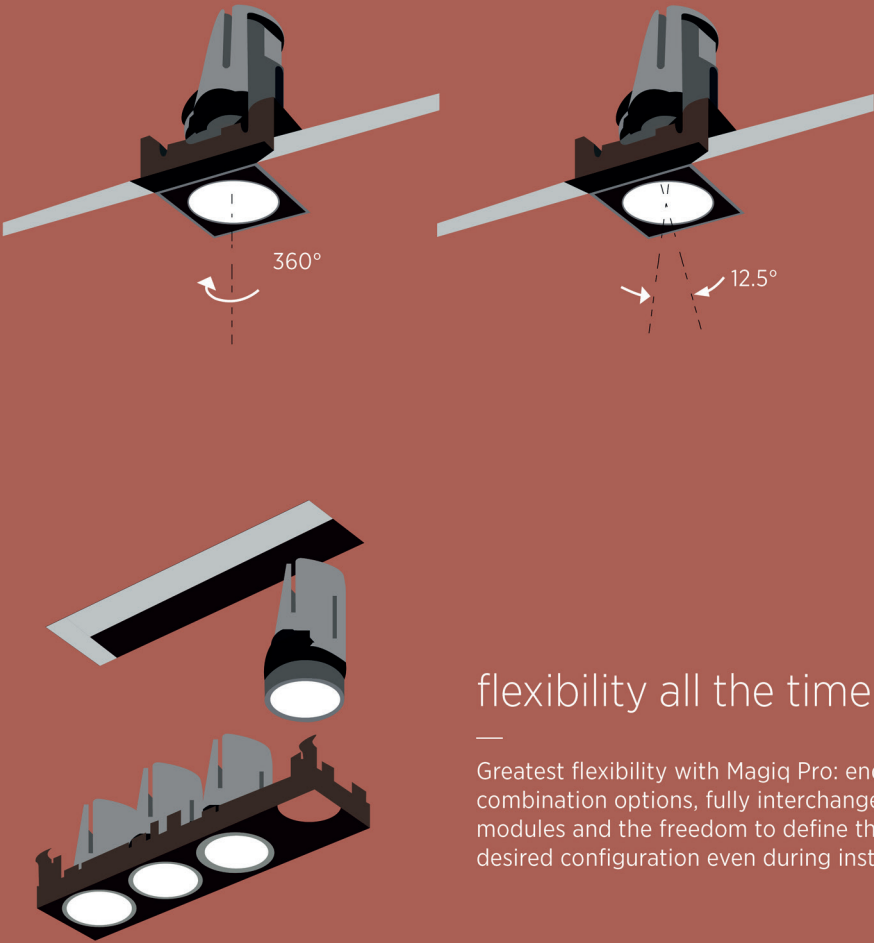

flexibility all the time

Greatest flexibility with Magiq Pro: endless combination options, fully interchangeable modules and the freedom to define the desired configuration even during installation.






oiko



oiko



oiko

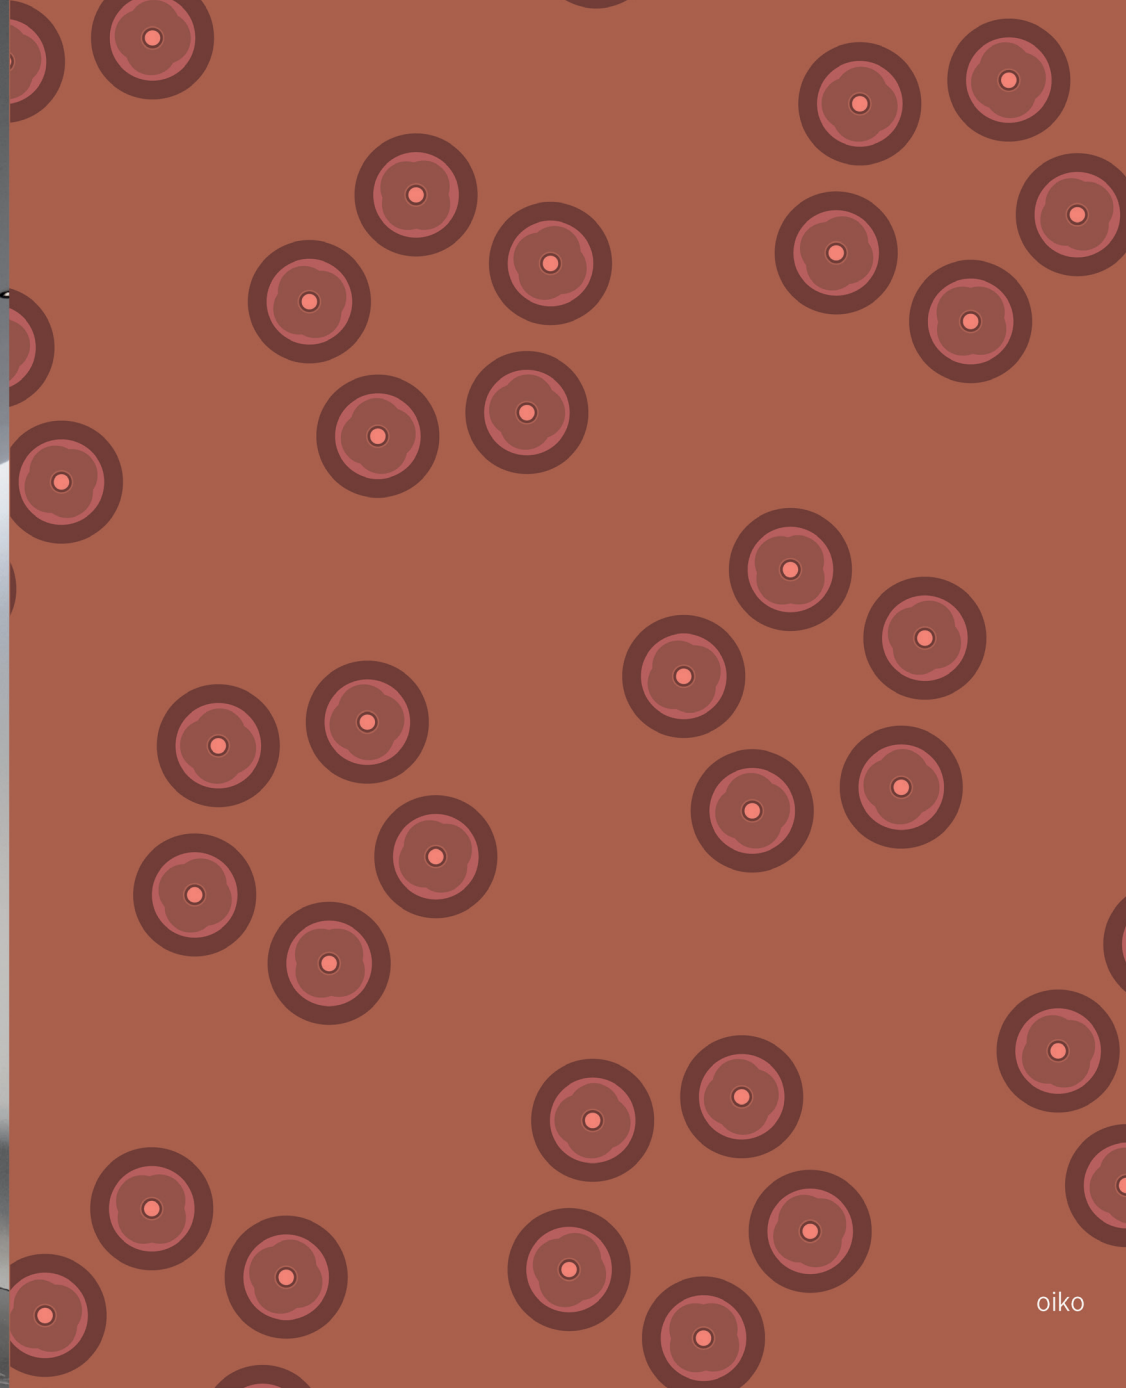

oiko



PROLICHT
designed to create



Calm, uniform light
for clear spaces.
Configure your
own OIKO.